


Consciot

User Manual

Smart Solar Landscape Light

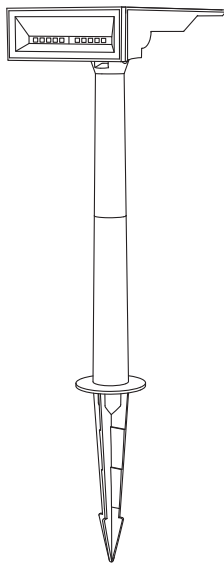

Works
with

AiDot




HOW-TO VIDEOS

CONTENT English

SPECIFICATION	01
INTRODUCTION	01
PACKAGE CONTENTS	01
INSTALLATION	02
OPERATION	02
BUTTON CONTROL	03
CONNECTING TO THE AiDot APP	03
CONTROLLING WS002C WITH THE AiDot APP	04
GROUP CONTROL	06
SYNC LIGHTS WITH MUSIC	06
TROUBLESHOOTING	07
GENERAL TIPS	08


SPECIFICATION



LEDs	10
Durability	Dust and Water Resistant
Temperature Range	14°F - 104°F (-10°C - 40°C)
Housing Material	ABS
Beam Angle	90°


INTRODUCTION

Smart Solar Spotlight WS002C seamlessly combines convenience and intelligence. Its plug-and-play wire-free solar-powered design makes setup a breeze, and the adjustable angle allows for easy aiming so you can highlight your yard in all the right places. Enjoy smart features such as group control and dynamic lighting. WS002C can sense the available light to turn on automatically from dusk until dawn.

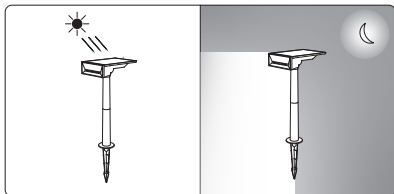

PACKAGE CONTENTS

- A Lamp body
- B Plastic Rod1
- C Plastic Rod2
- D Plastic Spike
- E User Manual




Note: Package contents vary by pack size (Available in 1, 2, and 6-pack)

Item	1Pack	2Pack	6Pack
A	1	2	6
B	1	2	6
C	1	2	6
D	1	2	6
E	1	1	1

INSTALLATION

Press the button and select a desired mode. Then choose a place that can get enough sunshine to install the light, the more sunshine it gets, the longer it can illuminate.


(1) Take out the lamp body, connect the rods and spike in different combinations based on the height you need, adjust the angle of lamp holder and solar panel.

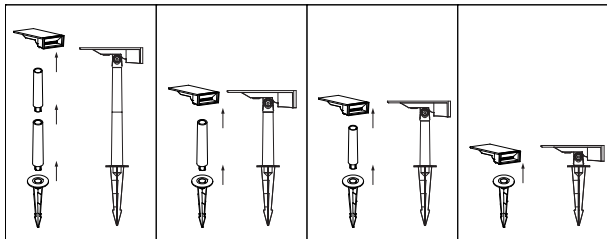

(2) Insert the assembled light into the ground vertically.

OPERATION

By default, the light will be off. Press the button to turn it on and to adjust modes.




BUTTON CONTROL

Press the button located at the bottom of WS002C to cycle through red, orange, yellow, green, blue, cyan, purple, 2,700K white, 6,500K white and off.

Note:

If you are using WS002C during the day, you may find that it turns off after a short time. By default, this time is 30 seconds. To keep the light on during daylight, cover the solar panel, which will also cover the luminance sensor.



CONNECTING TO THE AiDot APP

Steps to connect WS002C to the AiDot app:



1. Download the AiDot app by scanning the QR code below or searching for AiDot on the App Store or Google Play.



Google, Google Home and Google Play are trademarks of Google LLC.

2. Open the AiDot app and sign in, or create a new account.

3. Make sure Bluetooth is enabled on your mobile device.



4. Press and hold the button on the light until it enters pairing mode. The light will cycle between warm white and cool white to indicate this.

5. Tap "Add Device" or the "+" button. You can also use the "Nearby" option, which will search for nearby AiDot products in pairing mode. The app may ask for Bluetooth permissions on your phone. Allow these to connect to WS002C.

6. If you can't find your WS002C in the app, ensure it's in pairing mode as described in step 4. Then, try connecting again using the app.

Note:

WS002C can be controlled from a distance of up to 98 ft. (30 m) when unobstructed.


CONTROLLING WS002C WITH THE AiDot APP

With the AiDot app you can control:


- a) Power: Turn WS002C on or off.
- b) Brightness: Adjust the light level of WS002C.



c) Presets: Activate various light effects, themes, and scenes.




d) White: Vary the temperature of WS002C's white light from 2,700K to 6,500K.




e) Color: Choose a color for all or each of your WS002C lights. You can also create personalized lighting effects.

WS002C offers two operating modes:

1. Luminance Detection: WS002C will automatically turn on at dusk and remains on until dawn. It stays off during the daylight hours and collects solar power for the next night.



2. Light Mode: WS002C remains on, providing constant illumination of your space, suitable for scenarios requiring all-day lighting.




GROUP CONTROL

Group control synchronizes grouped WS002C lights by:


1. Activating preset lighting effects across the whole group.
2. Synchronizing light color and temperature for coordinated lighting.

Note: If after creating a group some products only light up for a limited time or fail to sync, your devices may be in different modes. Set each device within the group to the same mode.




SYNC LIGHTS WITH MUSIC

1. You can find the Sync with Music option from the device control page where it appears as "Music".



2. Using this feature, you can choose from presets or create your own lighting effects that match the music being played.

Note: To use the Sync Lights with Music feature, you must grant Bluetooth permissions to the AiDot app and ensure your mobile device's Bluetooth is turned on.



TROUBLESHOOTING

Issue	Troubleshooting Steps
The light fails to turn on.	1. Make sure you hear a click sound when the button is pressed. 2. Check for nearby light sources. When in luminance detection mode, a nearby light source that is bright enough may prevent your WS002C from automatically turning on. You can try relocating your WS002C, eliminating the nearby light source, or as a temporary solution you can cover the solar panel of your WS002C, which will also cover the luminance sensor, activating the light regardless of nearby light sources.
The light output from my WS002C is dim.	1. The brightness of the light is reduced when the battery level is low. The device will need to be charged before resuming its regular light output. 2. You can check the battery level of your WS002C through the AiDot app.
My WS002C turn on at different times.	Each WS002C automatically lights up when the ambient light in its area drops below 20 lux. Slight differences in the light level at the location of each light can cause them to activate and deactivate at different times. This is normal and expected behavior when set to luminance detection mode.

GENERAL TIPS

1. Smart Solar Spotlights supports ground insertion. During installation, ensure that the solar panel is not obstructed in any way to ensure adequate charging and smooth operation.
2. To prolong the lifespan of your light's battery, install it in a place with direct sunlight that covers the entire solar panel. Let each light charge for 48 hours before its first use.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Consciot

Our goal is to bring you the best shopping experience on Amazon. If you have any questions about our product, please feel free to contact us. Our customer service is right here to resolve the case.

-  **Call:** +1 (866) 698-6211 (PST 9:00am-5:00pm, Monday to Friday)
-  **support@consciot.com**
-  **<https://www.consciot.com>**
-  **Why not share your stories to help other buyers?**

FC RoHS

Made in China